

## Vapastop® Tape WF

### White Faced Aluminium Foil Tape

#### Application

Vapastop Tape WF is a white faced aluminium tape with a synthetic, high tack, high shear, pressure sensitive adhesive. It is an architectural tape that is not suitable for use where tape strength is required. However, its white facing creates an attractive finish to compliment white faced underlays as well as assisting in the creation of a vapour barrier.


Suitable for use in the following applications:

- Vapour barriers
- White faced architectural linings

#### Features and Benefits

- White Faced – Provides a decorative finish to match white faced foil installations
- Pure Aluminium Foil – Provides an effective vapour barrier

#### Product Description

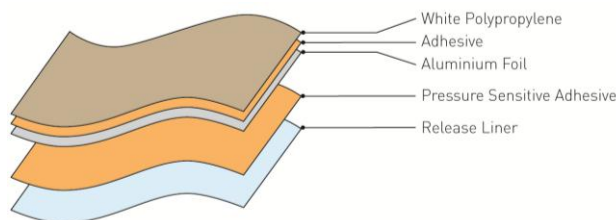

#### Technical Data

Backing Material	Polypropylene laminated to aluminium foil
Adhesive Type	Synthetic rubber/resin
Tensile Strength	24.5 N/25mm
Adhesion To Steel	20 N/25mm
Elongation At Break	25%
Total Thickness Without Liner	100 Microns
Recommended Service Temperature	-5 to 65°C

#### Installation

##### General

- For best adhesion ensure tapes are warmed to over 10°C before application (e.g. tape should not be cold to the touch)
- Prepare the surface to be joined by ensuring it is free of any excess moisture or debris
- Ensure the tape is centrally positioned over the join for the most effective and aesthetic finish
- Once tape is applied rub firmly to ensure firm adhesion (the use of a squeegee is recommended)

## Durability

When used, installed and maintained in accordance with the requirements outlined in this datasheet, Vapastop® Tape WF will meet or contribute to meeting the following provisions of the NZBC:  
**NZBC Clause B2: Durability** Meets the requirements of NZBC B2.3.1 a) 50 years and NZBC B2.3.1 b) 15 years

## Specification Notes

Product required: Vapastop® Tape WF White Faced Aluminium Foil Tape  
 Product Specification

Description	Product Code	Roll Size	Nominal Thickness	Rolls/Carton
Vapastop® Tape WF	780005	72mm x 50m	100 microns	16

## Storage

Vapastop® Tape WF must be protected against damage and weather. Tape must be stored under cover in a clean, dry environment. Do not crush product



Distributed by:  
 Tasman Insulation New Zealand Limited  
 9-15 Holloway Place, Penrose,  
 Auckland,  
 New Zealand

(1) This data sheet may have been superseded. Please refer to [www.pinkbatts.co.nz](http://www.pinkbatts.co.nz) for the most current information. This datasheet supersedes all previous versions. (2) Tasman Insulation New Zealand Ltd retains the right to change specifications without prior notification. (3) Do not use this product for any application not detailed in this data sheet. (4) Recommendations and advice regarding the use of this product are to be taken as a guide only. The purchaser should ascertain the suitability of this product for the particular end use situation intended and when used in conjunction with other products. (5) Consult Tasman Insulation New Zealand Ltd for further information. (6) All claims about this product are subject to any variation caused by normal manufacturing process and tolerances. (7) The liability of Tasman Insulation New Zealand Ltd and its employees and agents for any errors or omissions in this data sheet or otherwise in relation to the product is limited to the fullest extent permitted by law. Except where the consumer acquires the goods for the purposes of a business, any rights a consumer may have under the Consumer Guarantees Act, are not affected. (8) This information is provided without prejudice to Tasman Insulation New Zealand Ltd standard terms and conditions of sale.

*Please consider the environment before printing this document*

For further information visit [www.pinkbatts.co.nz](http://www.pinkbatts.co.nz) or call 0800 PINK BATTs (746 522)